



# The Near Earth Object Scout Spacecraft: A low-cost approach to in-situ characterization of the NEO population

**Eric A. Woepfel (presenting)**

Rensselaer Polytechnic Institute, Troy, NY, 12180, USA

**Dr. Steve Koontz,**

NASA JSC, Houston, TX, 77058, USA

**SpaceOps 2014, May 5-9 2014, Pasadena, California**



## NEO-Scout Design Team

- Eric A. Woepfel, Mackenzie Ott, James Balsamo, Jeremy A. Styborski, Christopher A. Roche, Matthew J. Scorza, Chris Doherty, Karl Fischer, Andrew J. Trovato, Christopher Volk, and Matthew East
- *Rensselaer Polytechnic Institute, Troy, NY, 12180, USA*
- Dr. Steven L. Koontz
- *NASA JSC, Houston, TX, 77058, USA*
- Dr. Riccardo Bevilacqua
- *Rensselaer Polytechnic Institute, Troy, NY, 12180, USA*
- Dr. Charles Swenson
- *Utah State University, Logan, Utah 84322-1400, USA*

Administrative and technical support provided by the Human Exploration Operations Mission Directorate and the Space Technology Mission Directorate are gratefully acknowledged as is travel support provided by the New York State Space Grant Consortium

## A new approach to NEO exploration exploiting CubeSat technology

- **Numerous NEOs pass close ( $< 0.3$  AU) to the Earth-Moon system every year**
- **NEO-Scouts to rendezvous with target NEOs during close approach to the Earth-Moon system**
  - Small largely “COTS” spacecraft launched as secondary payloads
  - Short mission duration (100 to 400 days) to reduce:
    - Spacecraft hardware reliability requirements/cost
    - Telemetry system power/size/cost
    - Spacecraft operations cost
    - Mission success risk
  - Short mission duration (100 to 400 days) to increase:
    - Rate of data return from NEO population
- **Benefits**
  - **High rate of return of in-situ measurements of NEO physical properties supporting Global Exploration Roadmap objectives at relatively low dollar cost**

## NEO-Scout Mission Objectives

- Our present knowledge of NEO surface and bulk properties is not sufficient to support high-confidence design and verification of NEO missions and mission hardware
  - Physical size, density, spin rate, surface mechanical properties, composition and volatiles content are unknown for most NEOs.
  - Recent NASA efforts to define an asteroid retrieval/redirection mission architecture struggled with the largely unknown and wide possible range of possible physical properties of the target NEOs.
- NEO-Scout will perform a limited set of target physical characterization measurements designed to provide:
  - Ground truth data supporting interpretation of remote sensing observations of NEOs in the visible, near infrared, thermal infrared, and radar wavelength ranges
  - Data supporting high-confidence engineering hardware and mission design for more ambitious manned and robotic missions
    - **NEO physical dimensions and density**
    - **NEO appearance and albedo**
    - **NEO surface mechanical properties**
    - **NEO surface mineralogy**
    - **NEO water/volatiles content**
- NEO-Scout can close some of these important strategic knowledge gaps

## NEO-Scout Concept of Operations

- NEO-Scout Spacecraft can be launched as either secondary or primary payloads on launch vehicles placing primary payloads in GEO, cis-Lunar space or Earth escape trajectories
  - After placement by the launch vehicle, the NEO-Scout(s) can begin transit to the target NEOs immediately or loiter as needed prior to departure for rendezvous with the target
  - Multiple NEO-Scouts can be launched on a carrier vehicle (e.g. a Boeing 702 SP) and then begin transit to target NEOs as required
- NEO-Scout is designed to operate at GEO and beyond
  - Solar electric propulsion (as described in the following)
  - Spiral out from LEO is not considered a desirable option at this time
    - Radiation belt hardware degradation
    - Increases mission time
  - Largely autonomous spacecraft operations
    - Continuous Beacon Monitor mode operations (e.g. Deep Space 1 and New Horizons)
    - High rate telemetry on command only
    - Deep Space Network 34 meter dish receivers nominal - 74 meter dishes as needed.

## The NEO-Scout Spacecraft - Overview

### NEO-Scout Spacecraft General Requirements and Characteristics

Dry Mass range	< 20 kg
Wet Mass range	< 35 kg
Delta V range	< 10 km/s
Mission Duration Range	100 to 400 days
Solar Electric Propulsion Thrust to Weight Ratio	$> 3 \times 10^{-4}$
Maximum Distance to Earth at NEO Rendezvous	0.3 AU
Maximum Telemetry Range	0.3 AU
Minimum Telemetry Data Rate at Maximum Range	1000 Bps
Telemetry Bit Error Rate at Maximum Range	$10^{-6}$ to $10^{-4}$
Solar Particle Event (SPE) Survivability	must survive 1 SPE
Payload Mass/Mass Fraction	3.5 kg/0.10
Single Spacecraft Cost Cap	< \$ 15 M



## NEO-Scout Design Approach

- Define high level NEO-Scout performance requirements and general characteristics (summarized in previous chart)
- Next, we select a relatively challenging NEO target
  - determine the characteristics of a low-trust trajectory for rendezvous with that target within the 400 day maximum mission duration limit and,
  - determine if we can design and assemble a spacecraft to fly the mission while staying within the desired weight and cost limits.
- The spacecraft dry weight limit is first combined with the maximum delta V requirement of 10 km/sec in the Tsiokolvsky rocket equation to calculate required propellant mass as a function of thruster specific impulse
  - Select the type of thruster type that would be able to meet the wet mass requirement
  - Only high specific impulse (hence exhaust velocity) electrostatic ion engines and Hall Effect thrusters can meet the propellant mass requirements for a 10 km/sec delta V and a 35 kg maximum wet mass

## NEO-Scout Design Approach (continued)

- Next survey commercially available high specific impulse satellite thrusters
  - Identify possible candidates for the NEO-Scout spacecraft design
  - An additional constraint appears at this point driven by the maximum mission duration limits
    - **The NEO-Scout thrust-to-weight ratio needs to be high enough to enable acceleration to the desired final velocity in the allotted mission time**
- The balance of the design effort involved determining whether or not the remaining spacecraft systems could be assembled into an integrated functional spacecraft that conformed to the general requirements and constraints
  - Use mature (TRL 6/7 or above) commercially available components with LEO flight heritage whenever possible
  - The design was further refined and optimized to meet the more detailed delta V and trajectory requirements for the specific target NEO selected



## NEO Target Selection for this Design Study

- To find NEOs whose orbit allows a rendezvous trajectory within the constraints of the NEO-Scout requirements, NASA's JPL/NEO/NHAT database was used
- This database includes all known NEO orbital elements and lists possible rendezvous and return trajectories using an impulsive Lambert's Problem solver
- Due to the large number of NEOs, a table was created from those which fall under the constraints shown in the table below. From these constraints, **2007 SQ6** was chosen, the constrained values for this NEO are included in the table

Parameter	Value Range	2007-SQ6
Launch Epoch/Date	Jan. 1, 2020 – Jan. 1, 2025	Oct. 10, 2023
Flight Time, Days	<365	105
Closest Approach at Rendezvous, AU	$\leq 0.15$	0.05
Orbital Inclination, Degrees	$\leq 10$	9.101
Eccentricity	$\leq 0.15$	0.1456
Semi-major Axis, AU	0.7 to 1.3	1.0430

## Trajectory and rendezvous analysis – NEO 2007 SQ6

- The 2007 SQ6 rendezvous trajectory reported here constitutes proof of concept that low thrust microsattellites will be able to rendezvous with asteroids that are not optimal targets, and therefore proves that low thrust microsatellite exploration of the NEO population is possible in general
- 2007 SQ6 was selected, not because it is an easy target, but instead because it is difficult to reach

Engine Burn	Epoch Engine Burn Start	Epoch Engine Burn Stop	Delta V (m/sec)	Propellant Consumption (kg)	Reason for Burn
1	23 Sept. 2022 06:58 UTC	26, Oct, 2022 22:09 UTC	5628.35	7.291	Inclination Change; Lower Periapsis; Raise Apoapsis
2	23 Jan. 2023 21:34 UTC	31 Jan, 2023 16:26 UTC	1639.5	1.673	Inclination and apse line change
3	11 Aug. 2023 21:34 UTC	15 Aug. 2023 0:00 UTC	0.672	0.672	Orbit matching
Total	23 Sept. 2022, 06:58 UTC	15 Aug. 2023, 0:00 UTC	7978.69	9.636	2007 SQ6 Rendezvous




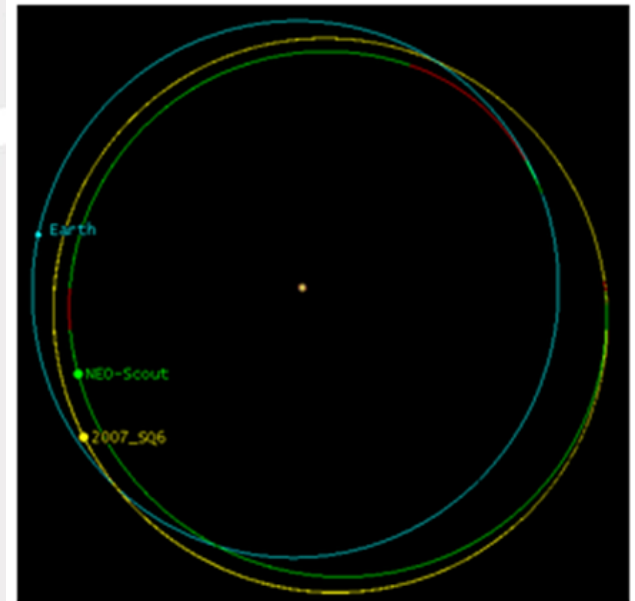


Figure 1. Locations on 8 February, 2023 and planned trajectory for rendezvous trajectory with 2007 SQ6

# Proximity Operations at 2007 SQ6

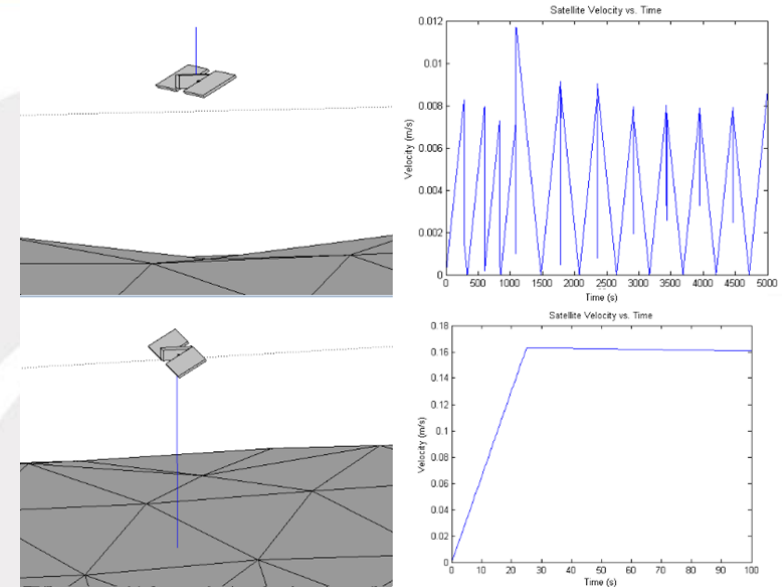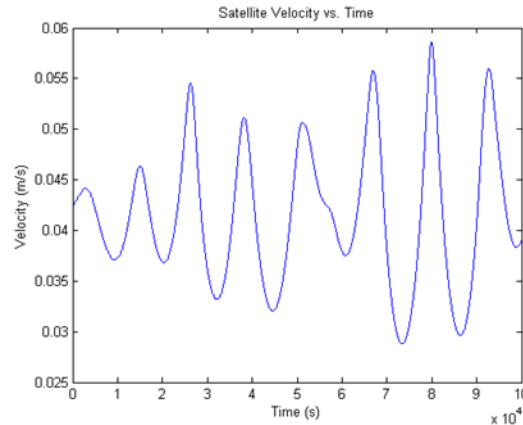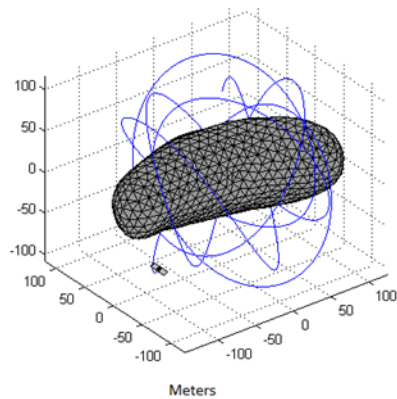

**A - Shows the NEO-Scout in a Passive Orbit over 1.157 days with initial velocity. Figure B - Shows the velocity as a function of flight time (a non-spherical shape is assumed for 2007SQ6 for purposes of demonstration)**

- Estimated diameter of 2007 SQ6 = 248 meters and assumed density of  $2500 \text{ kg/m}^3 \Rightarrow g = 8.7 \times 10^{-5} \text{ (m/s}^2\text{)}$ ; assuming a spherical shape -
  - near surface orbital velocity = 10.4 cm/s;
  - escape velocity = 14.7 cm/s
- Since there is currently no shape model of 2007 SQ6, a scale model of 433 Eros with maximum dimension of 248 meters is used for the asteroid proximity operations simulations
- NEO-Scout will use 12, 0.050 N cold gas attitude control thrusters for proximity operations.
  - NEO-Scout can accelerate to escape velocity from the asteroid surface in 15 seconds using two cold gas thrusters only.
- Actual NEO mass, density, and shape determined upon arrival at the asteroid

**A - Station keeping trajectory. B - Station keeping velocity profile. C - Asteroid launch trajectory. D - Asteroid launch velocity profile.**

# The NEO-Scout Spacecraft - Propulsion

The specific commercial products mentioned are examples only. Such mention does not constitute endorsement by the USG

- Main Propulsion - Busek BHT 600 Hall Effect Thruster

Engine	Tested Fuels	Thrust, mN	$I_{sp}$ , s	Power Input, W	Mass, kg
Busek BHT-600	Xe, Ar, Kr, I, Bi, Zn, Mg	39 (at 600W)	1585 (at 600W)	300-800	3

- Spacecraft dry mass 20 kg
- 9.5 kg  $I_2$  propellant
- Total thruster operating time = 47 days
- Total Delta V = 7.979 km/sec




Busek Hall Engine operating on  $I_2$

- Proximity operations - The Marotta Cold Gas Microthrusters (CGMs)

- 12 thrusters/spacecraft and for each thruster
  - » Thrust of 0.05 N, an  $I_{sp}$  of 65 s, a mass of less than 60 g,  $N_2$  propellant.
  - » Open response time of 5 ms; close response time of 5 ms
  - » Ideal operating pressure of 100 psia.
- The Marotta thruster is flight qualified and was previously developed for the GSFC Nanosats and the ST-5
- 4 CGMs operating for 15 seconds can accelerate the spacecraft from rest on the surface of 2007 SQ6 to escape velocity



Marotta CGM

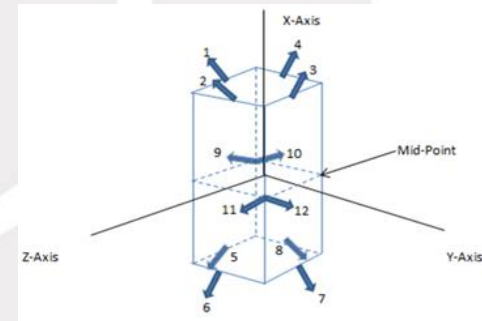


Placement of Marotta CGM thrusters

# The NEO-Scout Spacecraft - Telemetry

The specific commercial products mentioned are examples only. Such mention does not constitute endorsement by the USG

- Beacon Monitor
  - Deep Space 1 technology validation
  - S-Band
  - Commercially available 1 to 2 Watt CubeSat S-Band transmitter with matching wide beam antennas
  - Beacon Monitor on-board software package
- High Rate Telemetry
  - X-band
  - Link budget for different combinations of satellite high gain antenna diameter shown to the right
    - 34 meter Deep Space Network ground stations assumed
  - Commercial 2 watt X-band CubeSat transmitter with 30 cm diameter high gain directional satellite antenna
    - Transmitter power increase to 10W using X-band linear amplifier (IC) for short periods of time to increase bit rate
  - 1 megabit image downlink times @ 0.1 AU
    - 2 Watts/30 cm antenna - 63 seconds
    - 10 Watts/30 cm antenna - 13 seconds

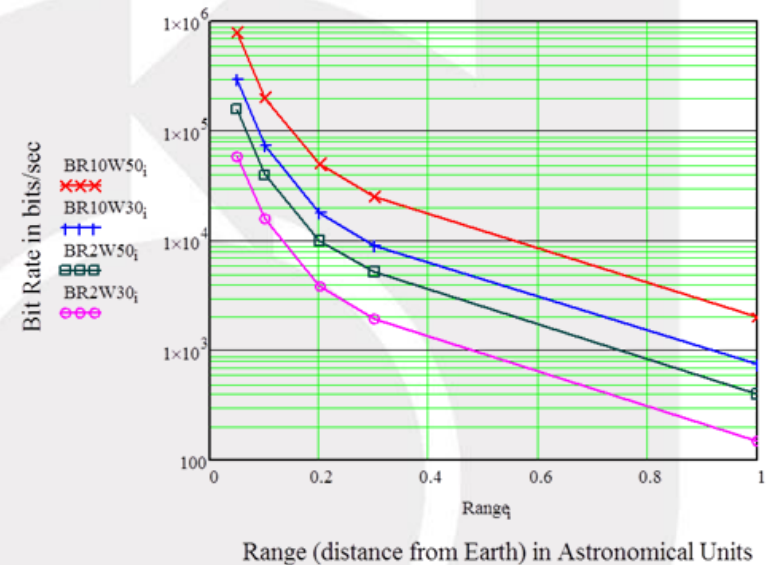

Expected NEO-Scout down link bit rates as a function of distance from Earth (AU) for 4 different combinations of satellite high gain antenna diameter and satellite X-band transmitter output power; e.g. BR10W50 = 10 W transmitter and 50 cm dish. Use of the 34 meter diameter DSN ground stations is assumed and the link margin is greater than 1 dB in all cases.

# The NEO-Scout Spacecraft

The specific commercial products mentioned are examples only. Such mention does not constitute endorsement by the USG

- **Command and Data Handling**

- Deep Space 1 metric validation of the Data Processing System are shown to the right
- Tyvek Intrepid Pico-Class
  - Compatible with autonomous software
  - Capable of MicroSD data storage
  - Variety of interfaces that are compatible with onboard avionics
  - 2 additional lower level processors for redundancy


- **Attitude Determination and Control**

- Ability to interface with GNC
- Micro Reaction Wheel Module (BCT XACT) provides an axial Torque of 0.6 mN m
- 0.05 N Cold Gas thrusters capable of reaction wheel desaturation and proximity maneuvers

- **Guidance, Navigation, and Control**

- NanoTracker (included in the BCT XACT) gets orientation with respect to celestial reference frame (with 2 s processing delay)
- Position and velocity can also be determined with the S-Band antenna via communication with DSN and ground stations

Processor (CPU)	Tyvak Intrepid Pico-Class	Deep Space 1 (RAD6000)
RAM	128 MB	128 MB
Flash	512 MB	6 MB
Processor Speed	400 MHz	20 MHz
Radiation Protection	not specified Latch-up protected	> 100 krad Latch-up Immune
Mass	.055 kg	~0.9 kg

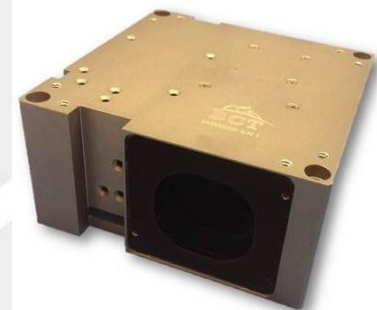



# The NEO-Scout Spacecraft

The specific commercial products mentioned are examples only. Such mention does not constitute endorsement by the USG

- **Electrical Power and Power Management**

- **Peak Power Requirements**
  - 650 W (engine on)
  - 100 W (engine off)
- **PV arrays**
  - 4.05 kg (2.3 m<sup>2</sup>) generates excess of 650 W at 27.7% efficiency
- **Power Processing Systems**
  - Busek PPU-600 selected to convert solar energy to the required voltage input for the BHT-600's operation
  - An additional PDM was selected for the low voltage avionics

- **Thermal Design and Control**

- Operation: 0 to 50 °C, Survival: -20 to 70 °C
- Passive MLI – Aluminized Teflon
  - 0.7AU-1.3AU
- The PMS and thruster must be thermally isolated from neighboring modules and connected to a heat sink
- Foil heaters are used for the thermal throttle in the PMS system



UTJ Solar cell



PDM for low voltage avionics


## NEO-Scout Payload Options

The specific commercial products mentioned are examples only. Such mention does not constitute endorsement by the USG



Instrument	Measurements	Mass (kg)
FLIR MLR-2k LIDAR	Distance to Object	0.115
<b>NanoCam C1U</b>	<b>Visible Imaging: Size, Appearance, Albedo</b>	<b>0.166</b>
FLIR Tau SWIR	Near IR Imaging: Size, Appearance, Albedo	0.131
FLIR Quark 640	Thermal IR Imaging: Surface Temperature Distribution	0.028
Surface Contact/Penetrator (TBD)	Mechanical Impact Properties	0.5
Miniature Radar Altimeter T2	Distance to Object and Surface Profile	0.375
<b>Argus 1000 IR Spectrometer</b>	<b>Near IR spectrometer for surface mineralogy</b>	<b>0.23</b>
<b>Compact Neutron Albedo Instrument (TBD)</b>	<b>Water, Hydrogen, Trapped Volatiles (Lunar Prospector)</b>	<b>0.5</b>
<b>Alpha Proton Spec. (TBD)</b>	<b>Composition: Light elements, Na, Al, Mg, Si, S (Mars Sojourner)</b>	<b>0.5</b>

- To Be Developed (TBD)
- **Bold red => CubeSat LEO flight heritage**
  - Risk assessment/possible modification for interplanetary environment
- **Bold black => Interplanetary flight heritage on larger spacecraft**
  - Development work required for NEO-Scout integration
- Plain text => commercial products only – no flight heritage
  - Development work required for NEO-Scout integration with assessment/upgrade for interplanetary flight environment

## The NEO-Scout Spacecraft

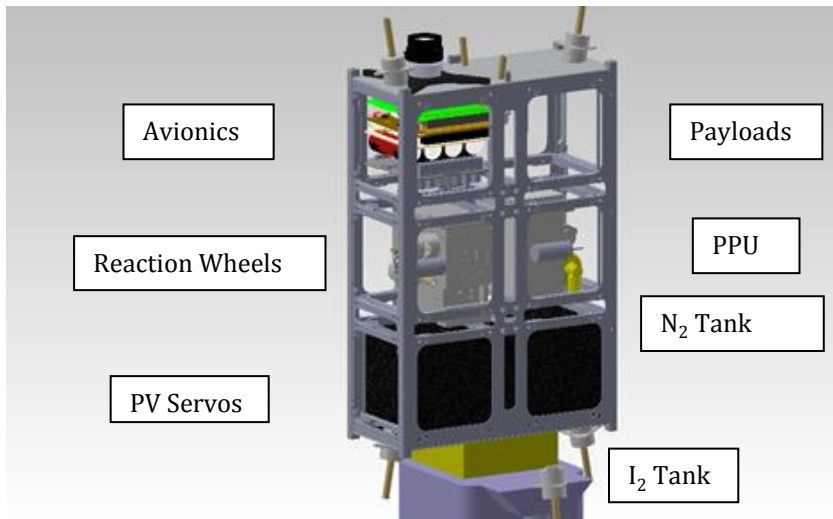

Parameter	Design Criteria	Achieved Metrics
Dry Mass range	< 20 kg	15 kg
Wet Mass range	< 35 kg	24.5 kg
Delta V range	< 10 km/s	7.629 km/s
Maximum Mission Duration	100 to 400 days	345 days
Maximum Distance to Earth at Rendezvous	0.3 AU	0.18 AU
Maximum Telemetry Range	0.3 AU	0.3 AU
Minimum Telemetry Data Rate	2000 to 10000 Bps	2000 Bps
Spacecraft Cost	\$ 15M	\$15M to \$25M

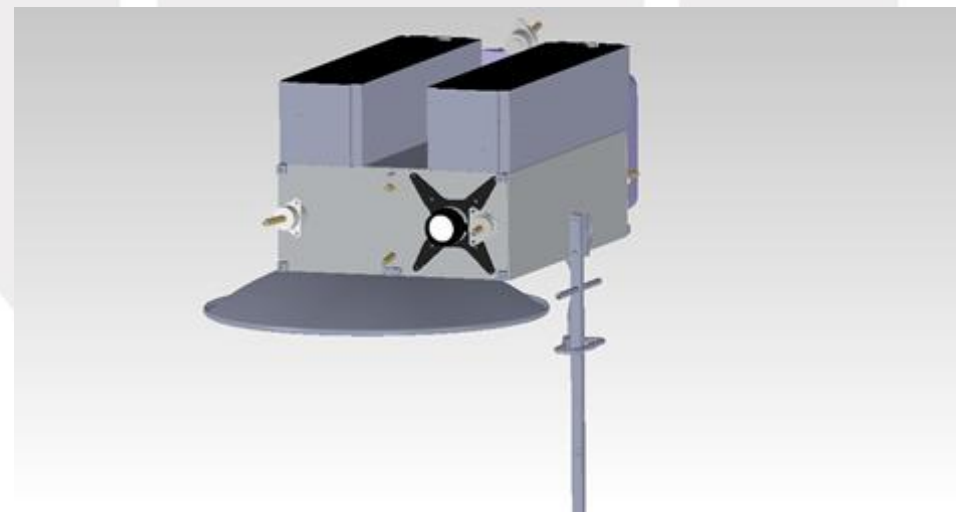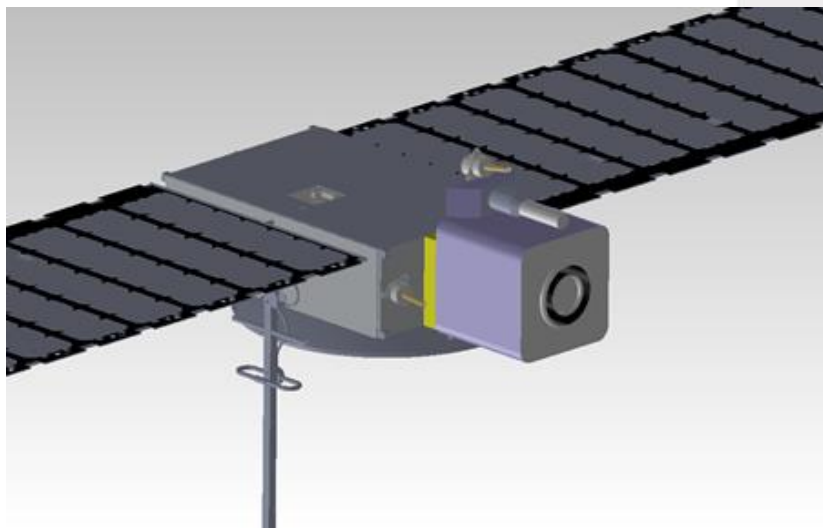


## NEO-Scout Cost Model

- **Aerospace Corporation Small Satellite Cost Model**
  - Based on historical cost data from satellite projects substantially larger than contemporary CubeSat projects including the one proposed here
  - The model has been used successfully for NEO-Scout sized spacecraft projects
    - Satellite complexity index of 0.3 to 0.4
    - Wet mass 35 kg
    - Conservative cost estimate range \$15M to \$25M for the first flight unit including software and limited spacecraft qualification and acceptance testing
- **Recent 3U CubeSat project cost examples**
  - Boeing PhantomPhoenix Nano commercially available for an estimated \$2M - \$3M including qualification and acceptance testing
    - Two string avionics system redundancy and 1.8 kg of payload capacity
    - LEO service
  - Several commercial CubeSat suppliers offer single string 3U spacecraft for LEO service for < \$1M
  - NASA Ames Research center has completed a number of successful 3U CubeSat flight projects in less than 2 years and at a total cost of less than \$10M

## Summary and Conclusions

- Technology tends to go from large to small, so why not satellites?
- The NEO scout concept is aligned support NASA's Space Technology Roadmap
  - TA-07 In Situ Resource Utilization - Destination Reconnaissance
- Limited specific technology development and refinement is indicated
- The preliminary NEO-SCOUT cost model is compatible with the NASA budgetary environment
  - Cost and scope growth will need to be controlled
- The NEO-Scout is a viable, low cost alternative to expensive Discovery class missions
  - The technical feasibility of the NEO-Scout concept has been demonstrated
  - Lightweight subsystems allow for lower thrust, decreased flight time, and less fuel used.
  - Utilizing COTs products allows for decreased research turnaround time.

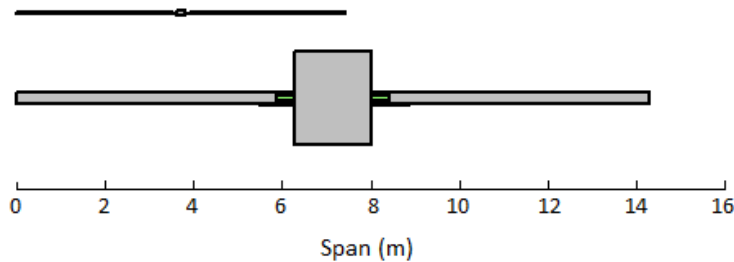


Spacecraft	NEO-Scout	Deep Space 1
Cost, million USD	15 to 25	152.3
Mass, kg	24.5	486.3
Span, m	7.5	14.2

# BACK-UP



# NEO-Scout Programmatic

## An affordable approach to in-situ characterization of the Near Earth Object (NEO) Population: The NEO-Scout Spacecraft

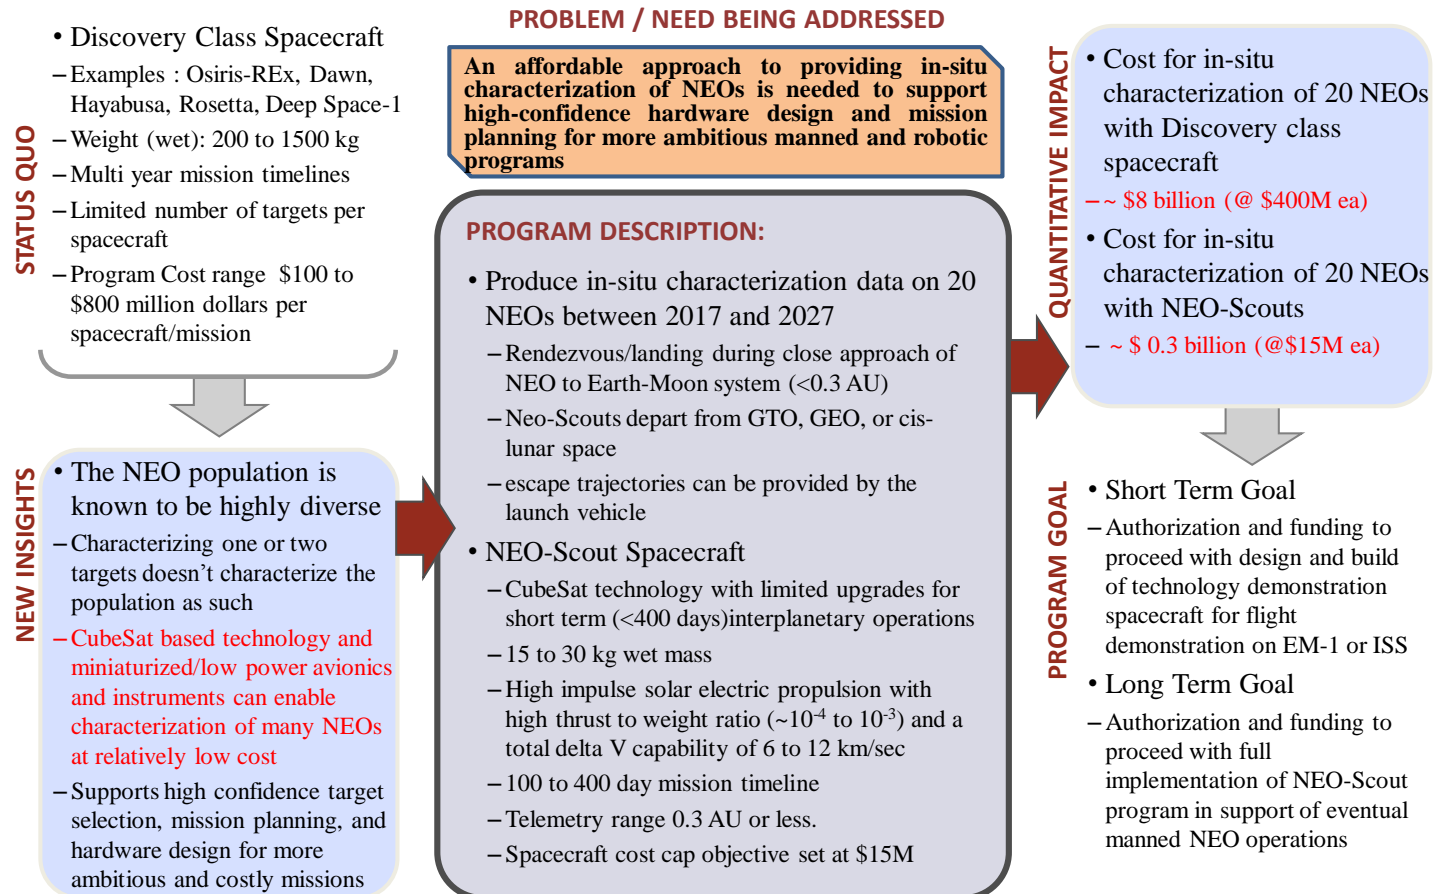

## NEO-Scout Programmatics (Cont.)


### An affordable approach to in-situ characterization of the Near Earth Object (NEO) Population: The NEO-Scout Spacecraft

#### Description and Objectives

- **Short Term Objectives** – Design, develop, build, test, and fly one 15 to 30 kg (wet) NEO-Scout flight prototype to demonstrate basic spacecraft functionality and qualify new technologies
  - Flight on EM-1 preferred with ISS as back-up plan
  - Interplanetary GN&C (including prox-ops)
  - Novel Solar Electric Propulsion System
  - Long range (< 0.3 AU) communications and tracking
  - Miniaturized sensors function and reliability
- **Long Term Objectives** – Design develop build test and fly fully capable, 15 to 30 kg (wet), NEO-Scouts and implement the NEO population characterization campaign
  - NEO size, albedo, and and spin rate determination
  - NEO soft landings and surface property characterization

#### Approach

- **Program Management Approach**
  - NASA to partner with universities and small innovation driven CubeSat companies to produce the technology demonstration unit and the fully capable NEO-Scout fleet
    - Multiple NASA center participation
    - Rensselaer Polytechnic Institute and Utah State University
  - Spacecraft integration and acceptance testing by NASA CS and site support contractors
  - Rigorous cost control with extensive use of verifiable COTS components to manage program cost
    - Flight proven NASA/Ames low-cost CubeSat project and hardware management approach

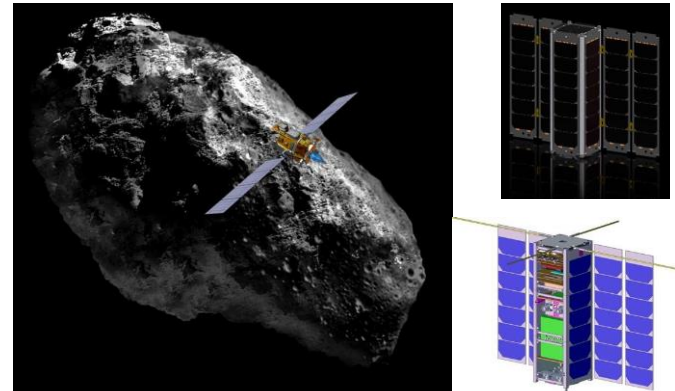

#### Cost, Schedule, and Status

- **Status** - the NEO-Scout project is in the concept formulation stage with no available funding at this time
  - JSC CS FTE with limited Ames/JPL and private sector collaboration
  - NEO-Scout abstract accepted at Space-Ops 2014
  - Major ESMD Senior Design Project (Rensselaer) reporting out 12/12/13 – Second semester effort planned
- **Schedule**
  - None defined at this time: Still building advocacy and seeking management position on priority and funding
  - Estimate two to three years from funding and project kick-off to flight ready hardware for the Short Term (EM – 1 flight) Objective
- **Cost**
  - Short Term Objective: estimate \$10M to \$15M for flight prototype
  - Long Term Objective: estimate \$450M for Program

# References

- <sup>1</sup>3rd Interplanetary CubeSat Workshop, URL: <http://icubesat.org/> [cited 6 April 2014].
- <sup>2</sup>AIAA/USU Conference on Small Satellites, URL: <http://digitalcommons.usu.edu/smallsat/> [cited 6 April 2014].
- <sup>3</sup>Staehle, R. L., et al., "Interplanetary CubeSats: Opening the Solar System to a Broad Band Community at Lower Cost," *Journal of Small Satellites* [online journal], Vol. 2, No. 1, URL: <http://www.jossonline.com/Papers.aspx?id=ftu84kjc> [cited 6 April 2014].
- <sup>4</sup>Conversano, R. W., and Wirz, R. E., "Mission Capability Assessment of CubeSats Using a Miniature Ion Thruster," *Journal of Spacecraft and Rockets*, AIAA Journal, Vol. 50, No. 5, 2013, pp. 1035-1046.
- <sup>5</sup>"Target NEO: Open Global Community NEO Workshop Report," *Proceedings of the Open Global Community NEO Workshop*, edited by B. Barbee, George Washington University, Washington D. C., 2011.
- <sup>6</sup>McFadden, L. A., Binzel, R. P.; Near Earth Objects, Chapter 14, Encyclopedia of the Solar System, Academic Press, New York, 2007, pp 283-300.
- <sup>7</sup>Rivkin, A. S.; "An Introduction to Near-Earth Objects," *Johns Hopkins APL Technical Digest*, 27(2), 2006, pp 111-120.
- <sup>8</sup>"Near Earth Object Program," *National Aeronautics and Space Administration* [online database], URL: <http://neo.jpl.nasa.gov/> [cited 6 April 2014].
- <sup>9</sup>"NEO Earth Close Approaches," *National Aeronautics and Space Administration* [online database], URL: <http://neo.jpl.nasa.gov/ca/> [cited 6 April 2014].
- <sup>10</sup>"Near-Earth Object Human Space Flight Accessible Targets Study," *National Aeronautics and Space Administration* [online database], URL: <http://neo.jpl.nasa.gov/nhats/> [cited 6 April 2014].
- <sup>11</sup>Landau, D., Strange, N., "Near Earth Asteroids Accessible to Human Exploration with High Power Electric Propulsion," *Proceedings of the AAS/AIAA Astrodynamics Specialist Conference*, paper AAS 11-146, July 31-August 4, 2011, Girdwood, Alaska.
- <sup>12</sup>Lee S., Hutputanasin A., Toorian A., and Wenschel Lan W., "CubeSat Design Specification." California Polytechnic State University, San Luis Obispo, CA
- <sup>13</sup>Karmer, H. J., "CubeSat Concept," *eoPortal Directory* [online encyclopedia], URL: <https://directory.eoportal.org/web/eoportal/satellite-missions/c-missions/cubesat-concept> [cited 8 April 2014].
- <sup>14</sup>"Hayabusa," *Encyclopedia Astronautica* [online encyclopedia], URL: <http://www.astronautix.com/craft/hayabusa.htm> [cited 6 April 2014].
- <sup>15</sup>Olds, J. R., Charania, A.C., and Koenig, J., "Foresight: Designing a Radio Transponder Mission to Near Earth Asteroid Apophis," *IAA Planetary Defense Conference*, 28 April 2009, URL: [http://www.sei.aero/eng/papers/uploads/archive/IAA\\_PD2009\\_1544473.pdf](http://www.sei.aero/eng/papers/uploads/archive/IAA_PD2009_1544473.pdf) [cited 4 April 2014]
- <sup>16</sup>Systems Tool Kit. Software Package, Vers. 10.1. Analytical Graphics, Inc., Exton, PA, 2013.
- <sup>17</sup>"NEAR Mission Profile," *National Space Science Data Center* [online database], URL: [http://nssdc.gsfc.nasa.gov/planetary/mission/near/near\\_traj.html](http://nssdc.gsfc.nasa.gov/planetary/mission/near/near_traj.html) [cited 6 April 2014].
- <sup>18</sup>Kahn, E.G., Barnouin, O.S., et al, "Improved Estimation of the Hayabusa SpaceCraft Trajectory and Lidar Tracks," 2012, 1648-1649, URL: <http://www.lpi.usra.edu/meetings/lpsc2012/pdf/1648.pdf> [cited 18 March 2014].
- <sup>19</sup>Kuninaka, H., Nishiyama, K., et. al., "Hayabusa Asteroid Explorer Powered by Ion Engines on the way to Earth," *Proceedings of the 31st International Electric Propulsion Conference*, Michigan, USA. 2009.
- <sup>20</sup>Sutton, G., and Biblarz, O., *Rocket Propulsion Elements*, 8th ed., John Wiley & Sons, Inc., Hoboken, NJ, 2010.
- <sup>21</sup>Szabo, J., et al. "Performance Evaluation of an Iodine-Vapor Hall Thruster," *Journal of Propulsion and Power* Vol 28.4, 2012, pp. 848-857.
- <sup>22</sup>Kieckhafer, A., and King, L.B., "Energetics of Propellant Options for High-Power Hall Thrusters," *Proceedings of the Space Nuclear Conference*, San Diego, CA, 2005.
- <sup>23</sup>"Hall Effect Thrusters," *Busek Space Propulsion and Systems*, [manufacturer website], URL: [http://www.busek.com/technologies\\_hall.htm](http://www.busek.com/technologies_hall.htm) [cited 8 April 2014].
- <sup>24</sup>"Hall Effect Thrusters," *Alta* [manufacturer website], URL: <http://www.alta-space.com/index.php?page=electric-propulsion> [cited 8 April 2014].
- <sup>25</sup>"Low Mass Low Power Hall Thruster System," *Small Business Innovation Research* [online database], URL: <https://www.sbir.gov/sbirsearch/detail/369381> [cited 8 April 2014].
- <sup>26</sup>Lobbia, R.B., and Gallimore, A.D., "Performance Measurements from a Cluster of Four Hall Thrusters," *Proceedings of the 30th International Electric Propulsion Conference*, Florence, Italy, 2007.
- <sup>27</sup>Bui, D.M., "Plume Characterization of Busek 600W Hall Thruster," Thesis, Air Force Institute of Technology, Wright-Patterson Air Force Base, OH, 2012.
- <sup>28</sup>Oslyak, S., et al. "Characterization of an Adjustable Magnetic Field, Low-Power Hall Effect Thruster", *Proceedings of the 32nd International Electric Propulsion Conference*, Wiesbaden, Germany, 2011

# References

- <sup>29</sup>“COBRA Gimbal,” *Tethers Unlimited* [online datasheet], URL: [http://www.tethers.com/SpecSheets/Brochure\\_Gimbal.pdf](http://www.tethers.com/SpecSheets/Brochure_Gimbal.pdf) [cited 8 April 2014].
- <sup>30</sup>Dankanich, John W., Hani Kamhawi, James Szabo and Bruce Pote, “Iodine Electric Propulsion for Interplanetary Small Satellite Applications,” *2013 Interplanetary Small Satellite Conference* [online database], URL: [http://www.intersmallsatconference.org/2013/docs2013/C.2.2\\_Dankanich\\_Presentation.pdf](http://www.intersmallsatconference.org/2013/docs2013/C.2.2_Dankanich_Presentation.pdf) [cited April 6 2014].
- <sup>31</sup>“Kapton Heaters,” *TEMPCO Electric Heater Corporation* [online datasheet], URL: <http://www.tempcocom/Catalog/Section%209-pdf/Foil%20Heaters.pdf> EMPCO Flexible Heaters [cited 8 April 2014].
- <sup>32</sup>Hillier, A. C., “Revolutionizing Space Propulsion through the Characterization of Iodine as fuel for Hall Effect Thrusters,” Thesis, Air Force Institute of Technology, Wright-Patterson Air Force Base, OH, 2011.
- <sup>33</sup>Szabo, J., Mike R., Surjeet P., Bruce P., Vlad H., Chas F., “Iodine Propellant Space Propulsion,” *Proceedings of International Electric Propulsion Conference*, Washington D.C., October 2013.
- <sup>34</sup>Nakles, M. R., Brieda L., Hargus Jr., W. A., Spicer R. L., “Experimental and Numerical Examination of the BHT-200 Hall Thruster Plume,” *43rd AIAA/ASME/SAE/ Joint Propulsion Conference & Exhibit* [online database], URL: <http://arc.aiaa.org/doi/abs/10.2514/6.2007-5305> [cited April 6 2014].
- <sup>35</sup>“BCT XACT,” *Blue Canyon Technologies* [online datasheet], URL: <http://bluecanyontech.com/wp-content/uploads/2012/07/BCT-XACT-datasheet-1.5.pdf> [cited April 6 2014].
- <sup>36</sup>“Cold Gas Microthruster,” *Marotta* [manufacturer website], URL: <http://www.marotta.com/fluid-control-building-blocks/cold-gas-microthruster.html> [cited 8 April 2014].
- <sup>37</sup>Mueller, J., Hofer, R., and Ziemer, J., “Survey of Propulsion Technologies Applicable to Cubesats,” *NASA JPL* [online database], URL: <http://trs-new.jpl.nasa.gov/dspace/bitstream/2014/41627/1/10-1646.pdf> [cited 9 April 2014].
- <sup>38</sup>Maini, Anil Kumar., and Varsha Agrawal. *Satellite Technology: Principles and Applications*. Chichester: John Wiley, 2007. Print.
- <sup>39</sup>“Space Solar Panels,” Spectrolab [online datasheet], URL: <http://www.spectrolab.com/DataSheets/Panel/panels.pdf> [cited 8 April 2014].
- <sup>40</sup>“Nano Power BP4 Series,” *GomSpace* [online datasheet], URL: <http://gomspace.com/documents/GS-DS-BP4-series-1.6.pdf> [cited April 6 2006].
- <sup>41</sup>“CubeSat Power Distribution Module,” *Clyde Space* [online datasheet], URL: [http://www.clyde-space.com/cubesat\\_shop/power\\_distribution\\_and\\_protection/95\\_cubesat-power-distribution-module](http://www.clyde-space.com/cubesat_shop/power_distribution_and_protection/95_cubesat-power-distribution-module)
- <sup>42</sup>Kaminski, D. and Jensen M. K., *Introduction to Thermal and Fluids Engineering*. Hoboken, NJ: Wiley, 2005. Print.
- <sup>43</sup>Taylor, J., Fernandez, M. M., Alamanac, A. B., Cheung, K. M., “Deep Space 1 Telecommunications,” NASA, JPL, California Institute of Technology, Pasadena, California, 2001
- <sup>44</sup>DeCoste, D., Finley, S. G., Hotz, H. B., Lanyi, G. E., Schlusmeyer, A. P., Sherwood, R. L., Sue, M. K., Szijarto, J., Wyatt, E. J., “Beacon Monitor Operations Experiment DS-1 Technology Validation Report,” Jet Propulsion Laboratory, California Institute of Technology, Pasadena California, 91109,
- <sup>45</sup>[http://www.cubesatshop.com/index.php?page=shop.product\\_details&flypage=flypage.tpl&product\\_id=9&category\\_id=5&option=com\\_virtuemart&Itemid=67](http://www.cubesatshop.com/index.php?page=shop.product_details&flypage=flypage.tpl&product_id=9&category_id=5&option=com_virtuemart&Itemid=67)
- <sup>46</sup><http://www.isispace.nl/cms/index.php/products-and-services/products>
- <sup>47</sup>Doody, D.; *Deep Space Craft* Chapter 1, Telepresence, Springer, Berlin, Heidelberg, New York, 2009, ISBN 978-3-540-89509-1
- <sup>48</sup> <http://deepspace.jpl.nasa.gov/>
- <sup>49</sup> <http://www.syrlinks.com/en/products/cubesats/hdr-x-band-transmitter.html>
- <sup>50</sup> <http://www.rfmd.com/CS/Documents/RFHA5966ADS.pdf>
- <sup>51</sup>No COTS CubeSat X-Band receivers have been identified to date – this will be a custom build or commands will be uplinked via the S band beacon system.
- <sup>52</sup> <http://www2.jpl.nasa.gov/basics/bsf10-1.php>
- <sup>53</sup>“NanoMind A712C Datasheet,” *GomSpace* [online datasheet], URL: <http://gomspace.com/documents/GS-DS-NM712C-1.1.pdf> [cited April 6 2014].
- <sup>54</sup> <http://www2.jpl.nasa.gov/basics/bsf13-1.php>
- <sup>55</sup>“MLR-2K Laser Rangefinder,” FLIR Electro-Optical Components, [online datasheet], 2013, Issue 1, Rev. 1, URL: [http://www.flir.com/uploadedFiles/CSVs\\_Americas/Cores\\_and\\_Components\\_NEW/Products/Components/Laser\\_Products/FLIR-MLR2K-Datasheet.pdf](http://www.flir.com/uploadedFiles/CSVs_Americas/Cores_and_Components_NEW/Products/Components/Laser_Products/FLIR-MLR2K-Datasheet.pdf) [cited 9 April 2014].
- <sup>56</sup>“NanoCam C1U Datasheet,” *GomSpace*, [online datasheet], 2011, Issue 6, Rev. 1, URL: <http://gomspace.com/documents/GS-DS-NANOCAM-6.1.pdf>. [cited 9 April 2014].



# References

- <sup>57</sup>“Tau SWIR 25 Miniature High-Performance Shortwave Infrared Camera,” FLIR Electro-Optical Components, [online datasheet], 2013, URL: <http://cvs.flir.com/tau-swir-25-datasheet>. [cited 9 April 2014].
- <sup>58</sup>“Longwave Infrared Thermal Core Camera,” FLIR Electro-Optical Components, [online datasheet], 2013, URL: <http://cvs.flir.com/quark-brochure> [cited 9 April 2014]
- <sup>59</sup>Galeev, A. A., and Zakharov, A. V., “Mars 96 Penetrator,” NASA-NSSDC [online database], URL: <http://nssdc.gsfc.nasa.gov/nmc/spacecraftDisplay.do?id=MARS96E> [cited 8 April 2014].
- <sup>60</sup>Webb, P., “Miniature Radar Altimeter,” Roke Manor Research Limited, Hampshire, UK, [online datasheet], 2013, URL: <http://www.roke.co.uk/resources/datasheets/mra-type-2.pdf> [cited 9 April 2014].
- <sup>61</sup>“Argus 1000 Infrared Spectrometer,” *CubeSatShop.com* [distributor website], URL: [http://www.cubesatshop.com/index.php?page=shop.product\\_details&flypage=flypage.tpl&product\\_id=91&category\\_id=16&option=com\\_virtuemart&Itemid=80](http://www.cubesatshop.com/index.php?page=shop.product_details&flypage=flypage.tpl&product_id=91&category_id=16&option=com_virtuemart&Itemid=80) [cited 8 April 2014].
- <sup>62</sup>Mitrofanov, I., “Dynamic Albedo of Neutrons (DAN),” *NASA-JPL MSL Science Corner* [online database], URL: <http://msl-scicorner.jpl.nasa.gov/Instruments/DAN/> [cited 8 April 2014].
- <sup>63</sup>“Mars Pathfinder Science Results,” *NASA-JPL Mineralogy and Geochemistry* [online database], URL: <http://mars.jpl.nasa.gov/MPF/science/mineralogy.html> [cited 8 April 2014].
- <sup>64</sup>Soderblom, L., et al., “Miniature Integrated Camera Spectrometer (MICAS),” *Technology Validation Symposium*, Pasadena, CA, February 2000.
- <sup>65</sup><https://www.aerospace.org/expertise/technical-resources/small-satellite-cost-model/>
- <sup>66</sup>Bearden, D. A., “Small-Satellite Costs,” *Crosslink*, pp 33-44, Winter 200/2001, Aerospace Corporation, El Segundo California.
- <sup>67</sup>Tafazoli, M.; “A study of on-orbit spacecraft failures,” *Acta Astronautica*, 64, (2009) 195-205
- <sup>68</sup>Maurer, R. H., Fraeman, M. E., Martin, M. N., Roth, D. R.; “Harsh Environments: Space Radiation Environments, Effects, and Mitigation,” *Johns Hopkins, APL Technical Digest*, Vol. 28, No. 1 (2008)
- <sup>70</sup>Koontz, S. L., Reddell, B., Boeder, P.; “Calculating Spacecraft Single Event Environments with FLUKA,” *Proceedings of the 2011 IEEE Radiation Effects Data Workshop*, pp 188-195, July 25-29, 2011, Las Vegas, Nevada
- <sup>71</sup>Koontz, S., Atwell, W., Reddell, B., Rojdev, K.; “Spacecraft Solar particle Event shielding,” *NASA/TP-2010-216-33*, Sept, 2010.
- <sup>72</sup>Jackman, Charles. “The Influence of Large Solar Proton Events on the Atmosphere,” 2012 *SORCE Science Meeting* [online database], URL: [http://lasp.colorado.edu/sorce/news/2012ScienceMeeting/docs/presentations/S2-04\\_Jackman\\_SORCE\\_SPEs\\_shown\\_NEW.pdf](http://lasp.colorado.edu/sorce/news/2012ScienceMeeting/docs/presentations/S2-04_Jackman_SORCE_SPEs_shown_NEW.pdf) [cited on 6 April 2014].
- <sup>73</sup>Masti, D., Gandomkar, S., and Zeynali O., “Shielding protection of electronic circuits against radiation effects of space high energy particles,” *Advances in Applied Science Research*, Vol. 3 ,Issue 1, 2012, p446.
- <sup>74</sup>Sigmund, P., *Particle Penetration and Radiation Effects*. Berlin: Springer, 200



*The World's Forum for Aerospace Leadership*